

Technical Data for Pascal-Series Mass Flow Controllers

10 sccm full scale through 20 SLPM full scale. Designed for diamond manufacturing.

Standard specifications. Consult Alicat for available options.



+1 (888) 290-6060
alicat.com

SENSOR AND CONTROL PERFORMANCE	
Mass flow accuracy ¹	Standard accuracy: $\pm 0.6\%$ of reading or $\pm 0.1\%$ of full scale, whichever is greater High-accuracy option: $\pm 0.5\%$ of reading or $\pm 0.1\%$ of full scale, whichever is greater
Flow repeatability (2σ)	$\pm(0.1\%$ of reading + 0.02% of full scale)
Pressure accuracy ²	Above 1 atm: $\pm 0.5\%$ of reading Below 1 atm: ± 0.07 PSIA
Steady state control range	0.01–100% of full scale (10,000:1 turndown ratio)
Operating pressure full scale	11.5–160 PSIA
Pressure sensitivity	Mass flow zero shift: $\pm 0.01\%$ of full scale per atm from tare pressure Mass flow span shift: $\pm 0.1\%$ of reading per atm from calibration conditions
Temperature sensitivity	Mass flow zero shift: $\pm 0.01\%$ of full scale per °C from tare temperature Mass flow span shift: $\pm 0.01\%$ of reading per °C from 25°C
Temperature accuracy	$\pm 0.75^\circ\text{C}$
Temperature range	-10 – 60°C (ambient and gas)
Valve function	Normally closed
Sensor response time	<1 ms
Typical control response time	As fast as 30 ms (T63), flow rate dependent, user-adjustable
Typical indication response time	<10 ms, flow rate dependent
Typical warm-up time	<1 s

1 After tare and under equilibrium conditions. Includes repeatability and linearity.

2 Under equilibrium conditions. Includes repeatability and linearity.

MECHANICAL	
Process connections	1/4" VCR® male
Wetted materials	302, 303, 304, 316L, and 430FR stainless steel; FKM, alumina ceramic, brass, glass, gold, heat-cured epoxy, heat-cured silicone rubber, polyamide, and silicon
Maximum pressure	Damage possible above 200 PSIA common mode pressure. Damage possible by rapid pressure change above 75 PSI differential pressure.
Relative humidity range	0–95%, non-condensing
Ingress protection	IP40
Leak integrity, external	$<1 \times 10^{-9}$ atm-cc/sec of helium
Leak integrity, through closed valve	$<1 \times 10^{-5}$ atm-cc/sec of helium
Mounting orientation sensitivity	None
Mounting holes	2× 8-32 UNC threaded, \downarrow 0.328" [8.33 mm]

POWER AND COMMUNICATIONS	
Digital input and output options	RS-232 Serial and Modbus RTU (default), RS-485 Serial and Modbus RTU, Modbus TCP/IP, DeviceNet, EtherCAT, EtherNet/IP, PROFINET, PROFIBUS
Digital data update rate ³	40 Hz at 19200 baud
Analog input and output options	4–20 mA, 0–5 Vdc, 1–5 Vdc, 0–10 Vdc
Analog data update rate ³	1 kHz
Analog signal accuracy	$\pm 0.1\%$ of full scale additional uncertainty
Interactive display	Monochrome LCD or color TFT display with integrated touchpad; simultaneously displays mass flow, volumetric flow, temperature, setpoint, and pressure
Display update rate	10 Hz
Electrical connection options	DB-9, DB-15, 8-pin M12, 6-pin locking, 8-pin mini-DIN
Power requirements ³	12–24 Vdc, 250 mA (290 mA if equipped with 4–20 mA output)

3 Consult the individual operating bulletins for specific industrial protocol power requirements and data transmission specifications.

Technical Data for Pascal-Series Mass Flow Controllers

10 sccm full scale through 20 SLPM full scale. Designed for diamond manufacturing.


Standard specifications. Consult Alicat for available options.




+1 (888) 290-6060
alicat.com

FEATURES	
STP reference conditions	25°C and 1 atm, user-configurable
NTP reference conditions	0°C and 1 atm, user-configurable
Gas Select™	98 user-selectable gases stored internally. Each gas optimized to match NIST's REFPROP 10 gas property calculations across the operating temperature and pressure ranges for highest accuracy.
COMPOSER™	20 user-definable gas mixes. Each mix may have up to 5 gases with 0.01% composition resolution.

RANGE-SPECIFIC TECHNICAL DATA	
Full scale flow	Pressure drop at full scale when venting air to atmosphere
10 SCCM	2.8 PSID
20–500 SCCM	1.0 PSID
1 SLPM	1.5 PSID
2 SLPM	3.0 PSID
5 SLPM	2.0 PSID
10 SLPM	5.5 PSID
20 SLPM	12.0 PSID

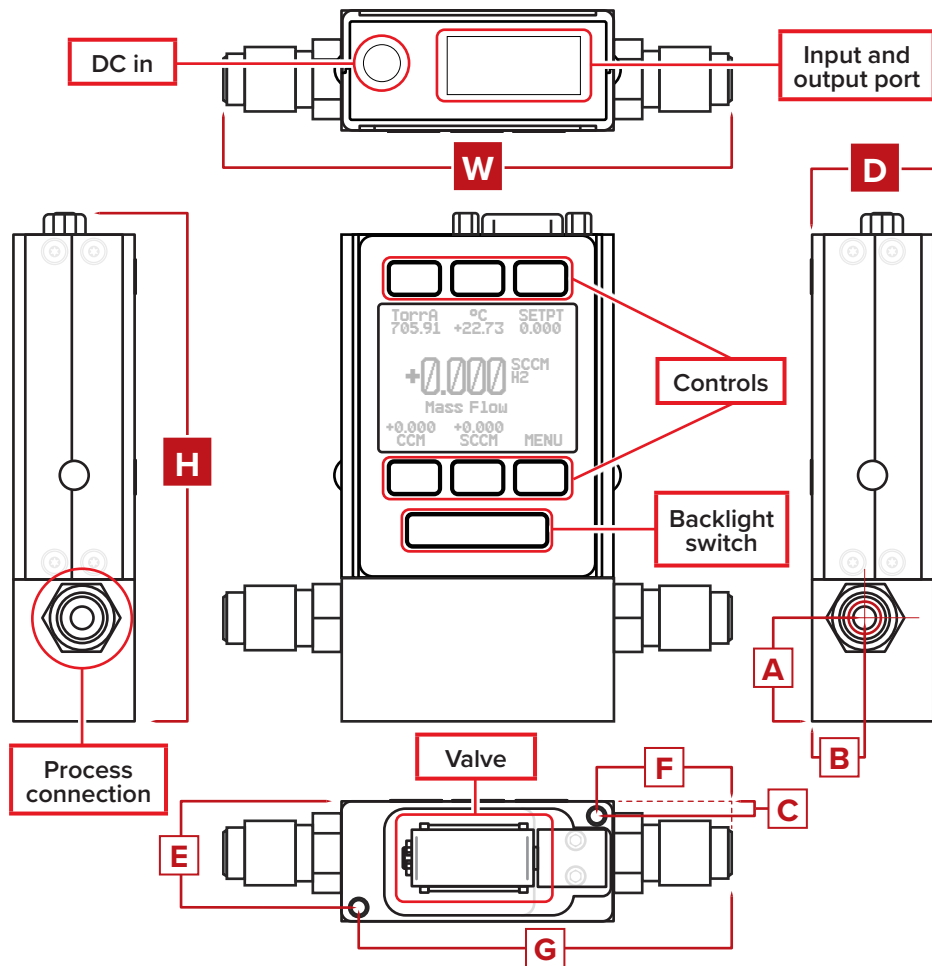

Representative Example

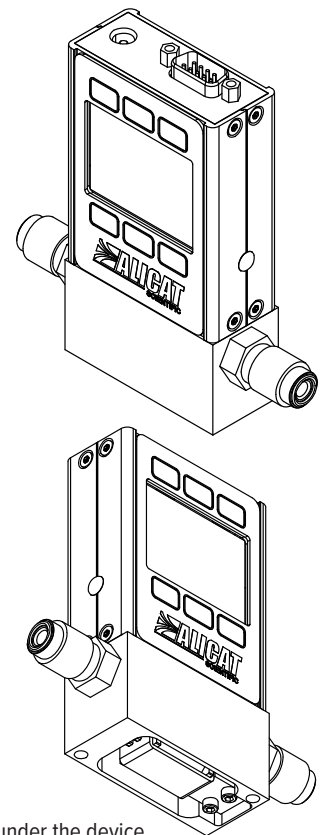

View under the device, showing the valve

DIMENSIONS									WEIGHT
Width	Depth	Height	A	B	C	E	F	G	
4.44"	1.05"	4.43"	0.90"	0.45"	0.13"	0.93"	1.18"	3.26"	≈ 1.3 lb
112.8 mm	26.7 mm	112.5 mm	22.9 mm	11.4 mm	3.2 mm	23.5 mm	30.1 mm	82.8 mm	≈ 0.6 kg